

POWER SOURCE

240V_{AC} TO 24V_{AC} TX SERIES Control Transformers




**1 YEAR
WARRANTY**

Specifications

INPUT VOLTAGE	VA RATING
TX40-240-24	40VA
TX40-240-24/DIN	40VA
TX63-240-24	63VA
TX63-240-24/DIN	63VA
TX100-240-24	100VA
TX100-240-24/DIN	100VA
TX160-240-24	160VA
TX250-240-24	250VA
TX400-240-24	400VA
TX630-240-24	630VA
TX800-240-24	800VA

Note: DIN Rail Mounting is not available for transformers above 100VA

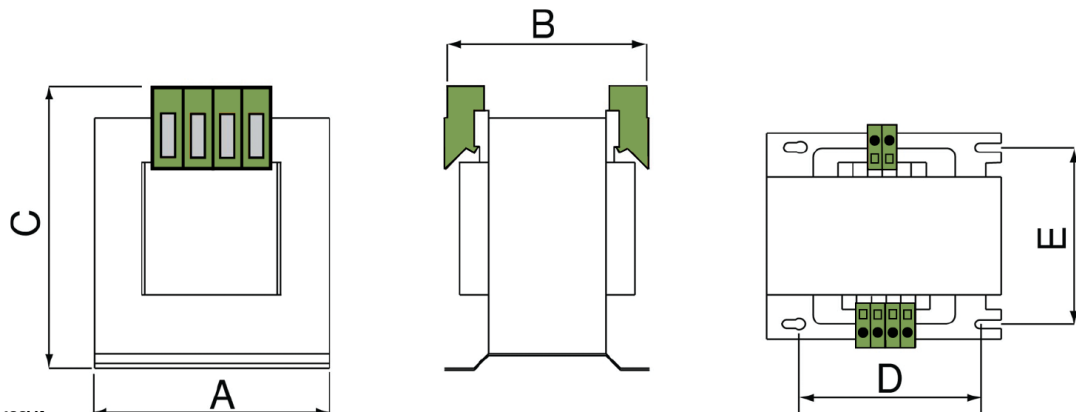

VA RATING	DIMS A x B x C	DIMENSION D	DIMENSION E	KG
40VA	78 x 72 x 95	56	46	1.4
63VA	78 x 72 x 95	56	46	1.5
100VA	87 x 75 x 98	64	62	2.3
160VA	96 x 92 x 110	84	74	2.5
250VA	96 x 100 x 110	84	85	3.4
400VA	120 x 100 x 130	90	85	5.6
630VA	150 x 110 x 155	122	90	8.4
800VA	150 x 130 x 155	122	105	9.5

Notes:

- AS.NZS 61558-1
- IP20
- Electrical Insulation: Class-B
- Max operation temperature: 130°C
*Equals ambient + case temperature