


# POWER SOURCE

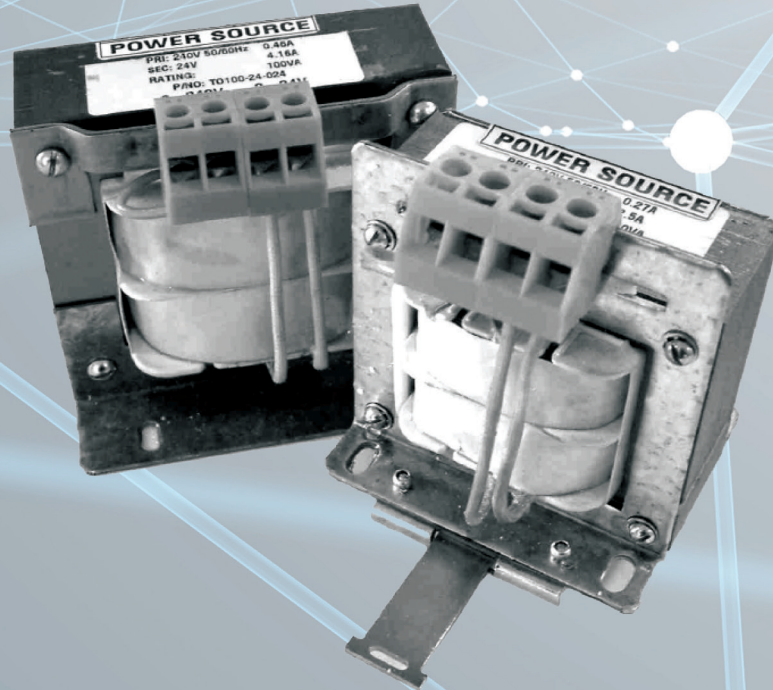

**1 YEAR  
WARRANTY**

**240W**

## **TO SERIES**

Single Phase  
Open Frame  
With Terminal  
Strip



### Features of the: TO Series

- ✓ Low Loss Iron Core
- ✓ Slotted Holes For Fast Installation
- ✓ Separate Insulated Windings
- ✓ Quality Terminal Blocks
- ✓ Fully Impregnated With Tropic Proof Anti-Fungus Varnish
- ✓ 1 Year Warranty
- ✓ Manufactured To AS/NZ3108-1994
- ✓ Optional DIN Rail Mounting Clip

# POWER SOURCE

SPECIFICATIONS	
Input Voltage	110V to 1000V AC
Frequency	50/60Hz
Output Voltages <sup>1</sup>	6V to 1000V AC
Rating	10VA to 10KVA
Insulation Class	H (155°C)

<sup>1</sup> STANDARD VOLTAGES	
240V-12V	415V-12V
240V-24V	415V-24V
240V-32V	415V-110V
240V-110V	415V-240V

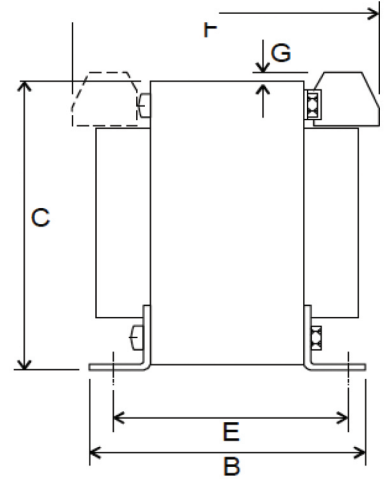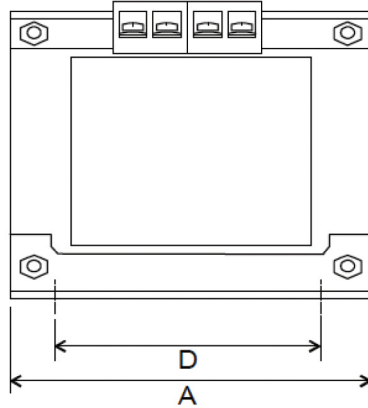

## Ordering Instructions Dimensions

Rating	A	B	C	D	E	Weight
10VA	57mm	52mm	78mm	47mm	35mm	0.5 kg
20VA	65mm	58mm	86mm	55mm	45mm	0.8 kg
40VA	76mm	60mm	97mm	62mm	46mm	1.1 kg
60VA	76mm	67mm	97mm	62mm	52mm	1.3 kg
75VA	76mm	78mm	97mm	62mm	62mm	1.9 kg
100VA	95mm	68mm	98mm	82mm	55mm	2.3 kg
150VA	95mm	87mm	95mm	83mm	75mm	3.0kg
200VA	95mm	98mm	102mm	83mm	84mm	4.0kg
250VA	96mm	113mm	97mm	83mm	99mm	4.6kg
300VA	114mm	109mm	114mm	75mm	92mm	5.1kg
400VA	115mm	131mm	114mm	75mm	105mm	6.4kg
500VA	133mm	97mm	134mm	111mm	77mm	6.5kg
750VA	133mm	123mm	133mm	111mm	102mm	9.0kg
1000VA	153mm	125mm	153mm	110mm	100mm	10.6kg
1250VA	153mm	152mm	150mm	112mm	125mm	13.8kg
1500VA	171mm	139mm	163mm	120mm	110mm	19.0kg
2000VA	192mm	140mm	190mm	160mm	112mm	24.5kg
2500VA	190mm	189mm	168mm	160mm	145mm	27kg
3000VA	230mm	160mm	191mm	190mm	125mm	30kg
4000VA	230mm	185mm	191mm	190mm	150mm	36kg
5000VA	230mm	210mm	191mm	190mm	175mm	44.2kg