



Features

- 4"x2" compact size
• IT & Medical safety approved (2 x MOPP) according to ANSI/AAMI ES60601-1, IEC/BS EN/EN60601-1 and IEC/BS EN/EN/UL 62368-1
• Suitable for BF application with appropriate system consideration
• Cooling by free air convection
• EMI class B for class I configuration
• No load power consumption<0.75W
• Protections: Short circuit / Overload / Over voltage
• Operating altitude up to 3000 meters
• 3 years warranty

Applications

- Oral irrigator
• Hemodialysis machine
• Medical computer monitors
• Sleep apnea devices


GTIN CODE

MW Search: https://www.meanwell.com/serviceGTIN.aspx

Description

RPS-60 is a 60W highly reliable green PCB type medical power supply with a high power density on the 4" by 2" footprint. It accepts 90~264VAC input and offers various output voltages between 3.3V and 48V. The working efficiency is up to 86% and the extremely low no load power consumption is down below 0.75W. RPS-60 is able to be used for Class I (with FG) system design. The extremely low leakage current is less than 130µA. In addition, it conforms to international IT and medical regulations (2\*MOPP) and EMC BS EN/EN55022/BS EN/EN55011, perfectly fitting all kinds of BF rated "patient contact" medical system equipment.

Model Encoding

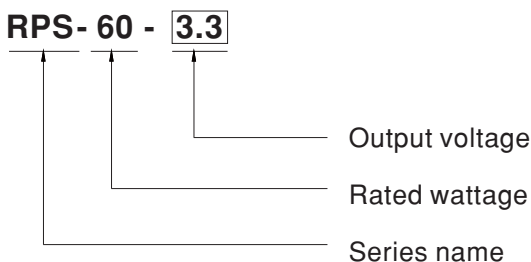





## SPECIFICATION

| MODEL                     | RPS-60-3.3  | RPS-60-5   | RPS-60-12               | RPS-60-15    | RPS-60-24  | RPS-60-48  |                   |  |
|---------------------------|---|--|-------------------------|--------------|--|--|-------------------|--|
| OUTPUT                    | DC VOLTAGE  | 3.3V   | 5V                      | 12V          | 15V  | 24V  | 48V               |  |
|                           | RATED CURRENT   | 10A  | 10A                     | 5A           | 4A   | 2.5A   | 1.25A             |  |
|                           | CURRENT RANGE   | 0 ~ 11A  | 0 ~ 11A                 | 0 ~ 5.5A     | 0 ~ 4.4A   | 0 ~ 2.75A  | 0 ~ 1.375A        |  |
|                           | RATED POWER   | 33W  | 50W                     | 60W          | 60W  | 60W  | 60W               |  |
|                           | PEAK LOAD(10sec.) Note.2  | 36.3W  | 55W                     | 66W          | 66W  | 66W  | 66W               |  |
|                           | RIPPLE & NOISE (max.) Note.3  | 60mVp-p  | 60mVp-p                 | 60mVp-p      | 100mVp-p   | 100mVp-p   | 100mVp-p          |  |
|                           | VOLTAGE ADJ. RANGE  | 3.1 ~ 3.6V   | 4.75 ~ 5.5V             | 11.4 ~ 13.2V | 13.5 ~ 16.5V   | 22.8 ~ 27.6V   | 45.6 ~ 52.8V      |  |
|                           | VOLTAGE TOLERANCE Note.4  | ±2.0%  | ±2.0%                   | ±2.0%        | ±2.0%  | ±1.0%  | ±1.0%             |  |
|                           | LINE REGULATION   | ±0.5%  | ±0.5%                   | ±0.5%        | ±0.5%  | ±0.5%  | ±0.5%             |  |
|                           | LOAD REGULATION   | ±1.0%  | ±1.0%                   | ±1.0%        | ±1.0%  | ±1.0%  | ±1.0%             |  |
|                           | SETUP, RISE TIME  | 500ms, 30ms/230VAC    500ms, 30ms/115VAC at full load  |                         |              |  |  |                   |  |
| HOLD UP TIME (Typ.)       | 60ms/230VAC    12ms/115VAC at full load   |  |                         |              |  |  |                   |  |
| INPUT                     | VOLTAGE RANGE   | 90 ~ 264VAC    127 ~ 370VDC  |                         |              |  |  |                   |  |
|                           | FREQUENCY RANGE   | 47 ~ 63Hz  |                         |              |  |  |                   |  |
|                           | EFFICIENCY (Typ.)   | 74%  | 79%                     | 84%          | 85%  | 87%  | 86%               |  |
|                           | AC CURRENT (Typ.)   | 1.8A/115VAC    1 A/230VAC  |                         |              |  |  |                   |  |
|                           | INRUSH CURRENT (Typ.)   | COLD START 60A/230VAC    30A/115VAC  |                         |              |  |  |                   |  |
|                           | LEAKAGE CURRENT(max.) Note.5  | Earth leakage current < 130μA/264VAC , Touch current < 100μA/264VAC  |                         |              |  |  |                   |  |
| PROTECTION                | OVER LOAD   | 115 ~ 150% rated output power<br>Protection type : Hiccup mode, recovers automatically after fault condition is removed  |                         |              |  |  |                   |  |
|                           | OVER VOLTAGE  | 3.8 ~ 5V   | 5.7 ~ 6.8V              | 13.8 ~ 16.2V | 17.2 ~ 20.3V   | 28.4 ~ 32.4V   | 55.2 ~ 64.8V      |  |
| ENVIRONMENT               | WORKING TEMP.   | -20 ~ +70°C (Refer to "Derating Curve")  |                         |              |  |  |                   |  |
|                           | WORKING HUMIDITY  | 20 ~ 90% RH non-condensing   |                         |              |  |  |                   |  |
|                           | STORAGE TEMP., HUMIDITY   | -40 ~ +85°C, 10 ~ 95% RH non-condensing  |                         |              |  |  |                   |  |
|                           | TEMP. COEFFICIENT   | ±0.03%/°C (0 ~ 50°C)   |                         |              |  |  |                   |  |
|                           | VIBRATION   | 10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes  |                         |              |  |  |                   |  |
|                           | OPERATING ALTITUDE Note.6   | 3000 meters  |                         |              |  |  |                   |  |
| SAFETY & EMC (Note 8)     | SAFETY STANDARDS  | IEC 60601-1:2005+A1+A2, TUV BS EN/ EN 60601-1:2006+A1+A12+A2, ANSI/AAMI ES60601-1:2005+A2, CAN/CSA C22.2 No. 60601-1:2014+A2, IEC 62368-1:2014, UL 62368-1, 2nd Ed, CSA C22.2 No. 62368-1-14, 2nd Ed, TUV BS EN/ EN 62368-1:2014+A11, EAC TP TC 004 approved |                         |              |  |  |                   |  |
|                           | ISOLATION LEVEL   | Primary-Secondary: 2xMOPP, Primary-Earth:1xMOPP, Secondary-Earth:1xMOPP  |                         |              |  |  |                   |  |
|                           | WITHSTAND VOLTAGE   | I/P-O/P:4KVAC    I/P-FG:2KVAC    O/P-FG:1.5KVAC  |                         |              |  |  |                   |  |
|                           | ISOLATION RESISTANCE  | I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC/ 25°C/ 70% RH   |                         |              |  |  |                   |  |
|                           | EMC EMISSION  | Parameter  | Standard                |              |  |  | Test Level / Note |  |
|                           |   | Conducted emission   | BS EN/EN55011 (CISPR11) |              |  |  | Class B           |  |
|                           |   | Radiated emission  | BS EN/EN55011 (CISPR11) |              |  |  | Class B           |  |
|                           |   | Harmonic current   | BS EN/EN61000-3-2       |              |  |  | Class A           |  |
|                           | Voltage flicker   | BS EN/EN61000-3-3  |                         |              |  | -----  |                   |  |
|                           | EMC IMMUNITY  | BS EN/EN55035 , BS EN/EN60601-1-2  |                         |              |  |  |                   |  |
| Parameter                 |   | Standard   |                         |              |  | Test Level / Note  |                   |  |
| ESD                       |   | BS EN/EN61000-4-2  |                         |              |  | Level 4, 15KV air ; Level 4, 8KV contact                             |                   |  |
| RF field susceptibility   |   | BS EN/EN61000-4-3  |                         |              |  | Level 3, 10V/m( 80MHz~2.7GHz )<br>Table 9, 9~28V/m( 385MHz~5.78GHz ) |                   |  |
| EFT bursts                |   | BS EN/EN61000-4-4  |                         |              |  | Level 3, 2KV   |                   |  |
| Surge susceptibility      |   | BS EN/EN61000-4-5  |                         |              |  | Level 4, 4KV/Line-FG; 2KV/Line-Line                                  |                   |  |
| Conducted susceptibility  |   | BS EN/EN61000-4-6  |                         |              |  | Level 3, 10V   |                   |  |
| Magnetic field immunity   |   | BS EN/EN61000-4-8  |                         |              |  | Level 4, 30A/m   |                   |  |
| Voltage dip, interruption | BS EN/EN61000-4-11  |  |                         |              | 100% dip 1 periods, 30% dip 25 periods, 100% interruptions 250 periods |  |                   |  |
| OTHERS                    | MTBF  | 5153.0K hrs min.    Telcordia SR-332 (Bellcore) ; 353.6K hrs min.    MIL-HDBK-217F (25°C)  |                         |              |  |  |                   |  |
|                           | DIMENSION (L*W*H)   | 101.6*50.8*29mm or 4" * 2" * 1.141" inch   |                         |              |  |  |                   |  |
|                           | PACKING   | 0.15Kg; 96pcs/15.4Kg/0.89CUFT  |                         |              |  |  |                   |  |
| NOTE                      | <ol style="list-style-type: none"> <li>All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</li> <li>33% Duty cycle maximum within every 30 seconds. Average output power should not exceed the rated power.</li> <li>Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 μ F &amp; 47 μ F parallel capacitor.</li> <li>Tolerance : includes set up tolerance, line regulation and load regulation.</li> <li>Touch current was measured from primary input to DC output.</li> <li>The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).</li> <li>Heat Sink HS1,HS2 can not be shorted.</li> <li>The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on <a href="https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf">https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf</a> )</li> </ol> <p>※ Product Liability Disclaimer : For detailed information, please refer to <a href="https://www.meanwell.com/serviceDisclaimer.aspx">https://www.meanwell.com/serviceDisclaimer.aspx</a></p> |  |                         |              |  |  |                   |  |


■ Block Diagram

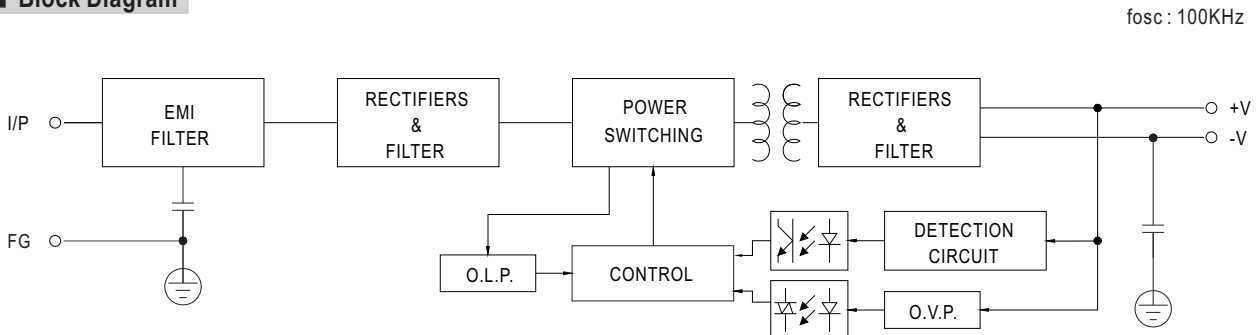

■ Output Derating

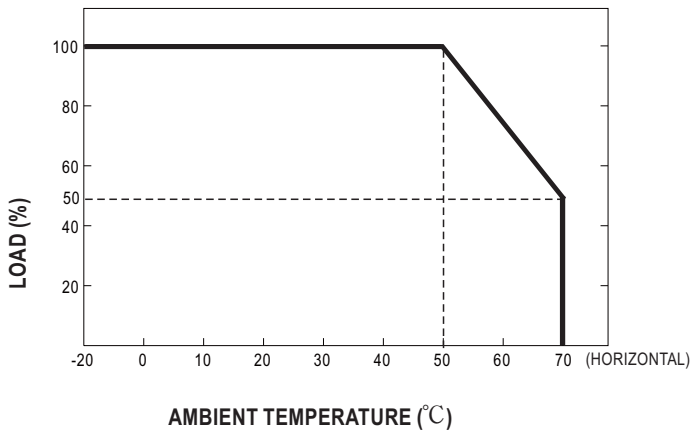


■ Output Derating VS Input Voltage

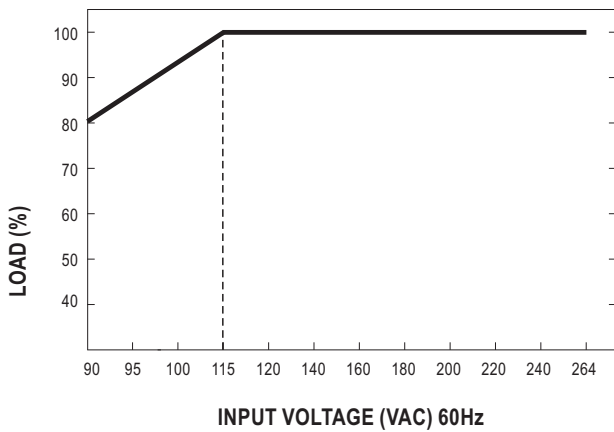

**Mechanical Specification**

(Unit: mm , tolerance  $\pm 1$ mm)

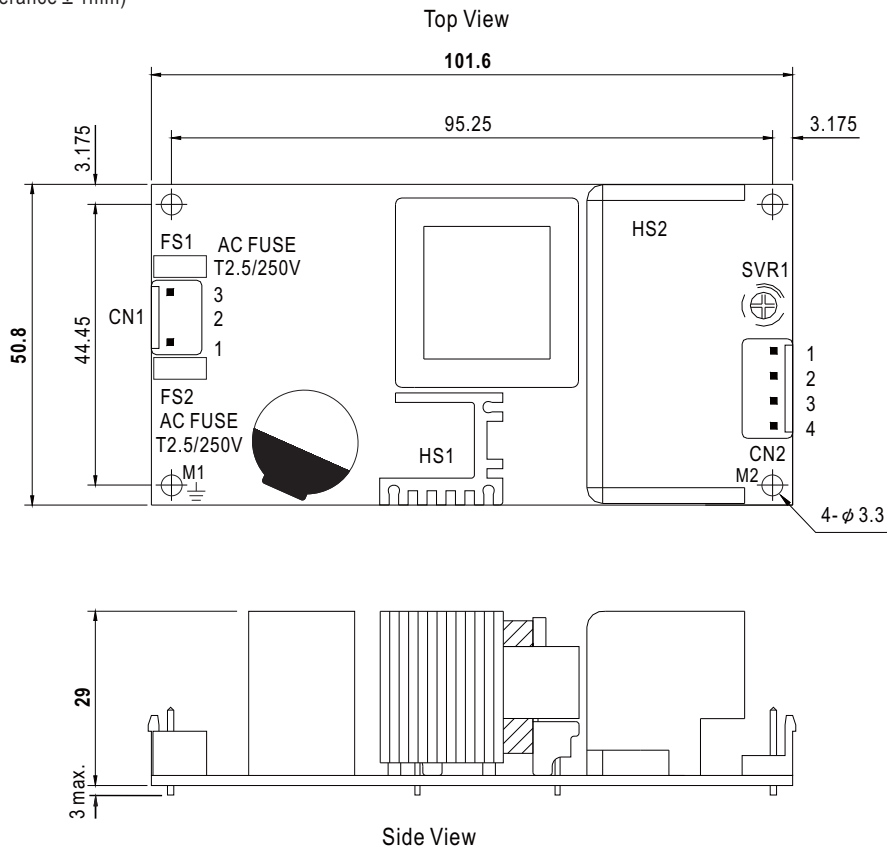

AC Input Connector (CN1) : JST B3P-VH or equivalent

| Pin No. | Assignment | Mating Housing           | Terminal                          |
|---------|------------|--------------------------|-----------------------------------|
| 1       | AC/N       | JST VHR<br>or equivalent | JST SVH-21T-P1.1<br>or equivalent |
| 2       | No Pin     |                          |                                   |
| 3       | AC/L       |                          |                                   |

DC Output Connector (CN2) : JST B4P-VH or equivalent

| Pin No. | Assignment | Mating Housing           | Terminal                          |
|---------|------------|--------------------------|-----------------------------------|
| 1,2     | +V         | JST VHR<br>or equivalent | JST SVH-21T-P1.1<br>or equivalent |
| 3,4     | -V         |                          |                                   |

$\text{⏏}$  : Grounding Required

- 1.HS1,HS2 cannot be shorted.
- 2.M1 is safety ground. For better EMC performance,  
Please secure an electrical connection between  
M1,M2 and chassis grounding.

**Installation Manual**

Please refer to : <http://www.meanwell.com/manual.html>